


Focal Point Determination for Offset Parabolic Dish

15-01-2010


Thomas Hillard – Author

This will nearly approximate the focal point of an offset parabolic dish. It uses the HDL_ANT Version 2.1 or higher program by Paul Wade available for download from the Internet. <http://www.arrl.org/qexfiles/>
For practical purposes it will predict a usable focal point for adjusting an LNBF. A bracket can then be made to permanently mount the LNBF.

Procedure:

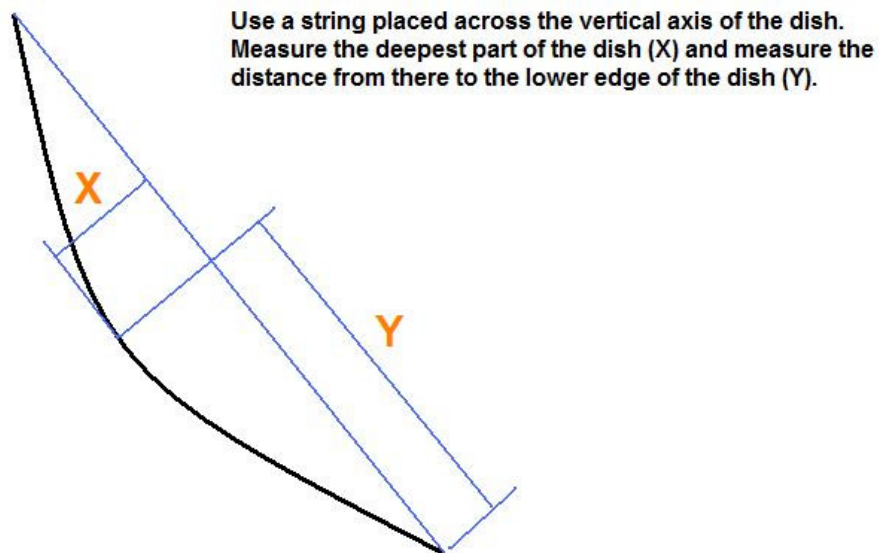

The HDL_ANT program will output "a" and "b".
Using a string represented by the blue line,
mark the intersection point "c" on the string.
Stretch the string to the LNBF at "c".

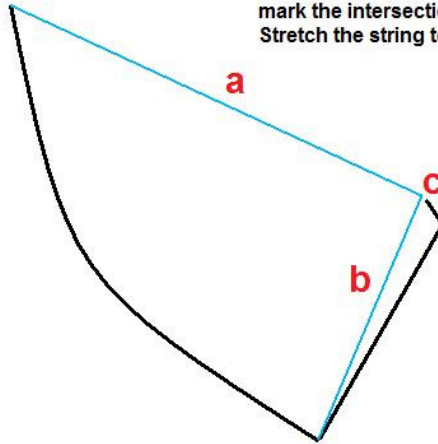


Post_ITB 4.pdf - Adobe Reader

Model No.	KD120S
Reflector Optical	Offset
Offset Angle	27.3
Aperture Efficiency	>90%
Horizontal Axis	120 cm 47.24"
Vertical Axis	135 cm 53.15"
GAIN@12.5 GHz Ku-Band	44.9 dB
Focal Length	90 cm
F/D Ratio	0.6
Mount Type	Az/EI
Azimuth Alignment	360°
Elevation Alignment	15° ~ 65°
Pole Diameter	76 mm
Operating Temperature	-40 °C ~ +60 °C
Operation Wind	90 km/H
Survival Wind	180 km/H
Dish Depth	5.125"


OffsetDishManual Documents Post_ITB 4.pdf - Ad... 9:10 PM

To covert cm to inches multiply cm by .394= Inches


If you have the spec. sheet for the dish you need the V Axis and H Axis dish measurements given. If you only have the dish, measure the Vertical axis of the dish surface. Exclude any part of the rim that is used for stiffening. Do the same for the Horizontal axis. You will plug these measurements into the HDL_ANT program.

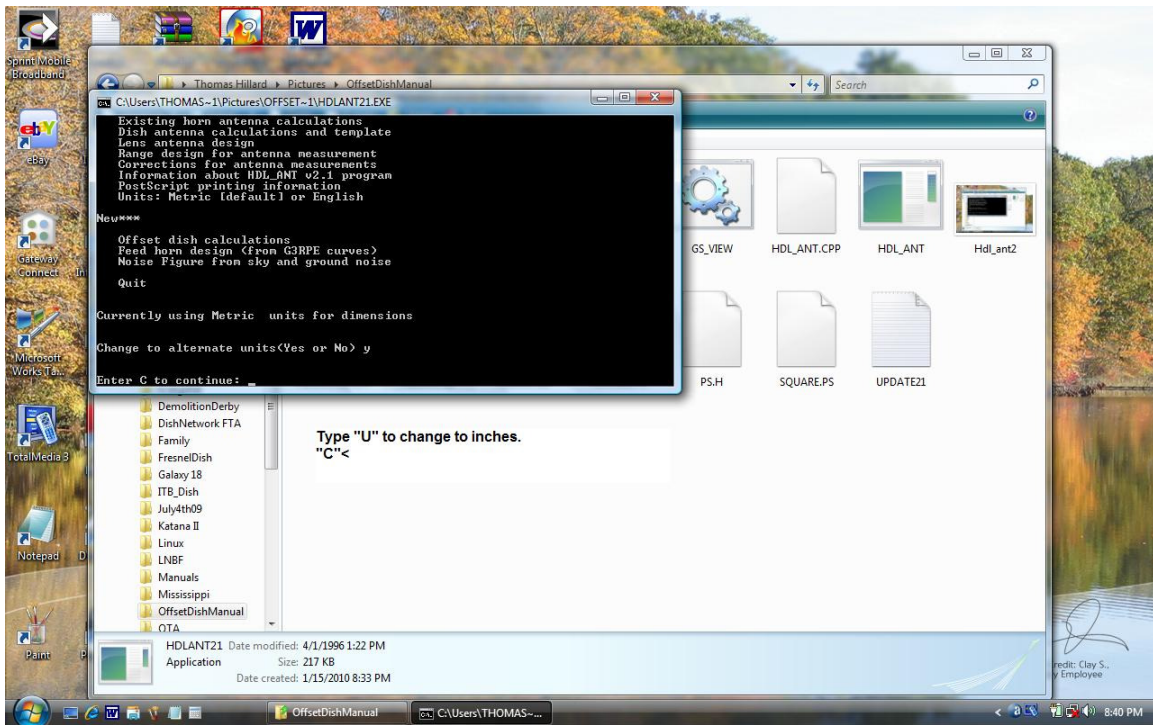


Boot the program and a dos window will appear. Follow the instructions above.

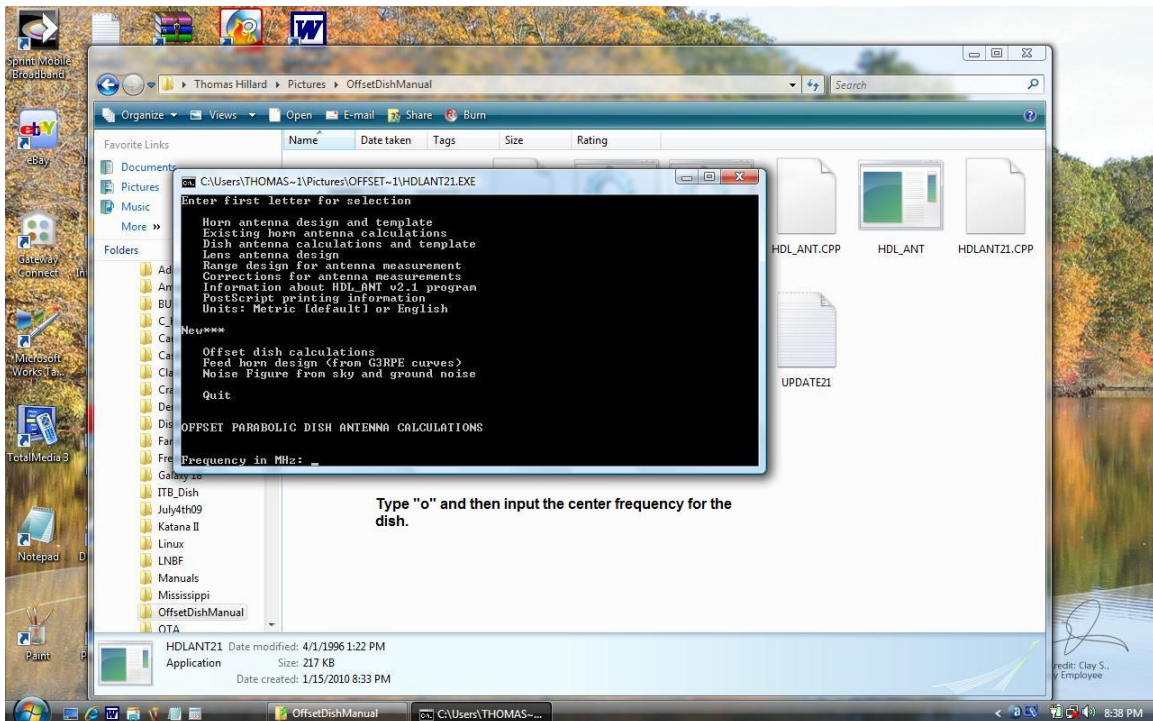


Version 2.1 and later will do the calculations for Offset dishes.

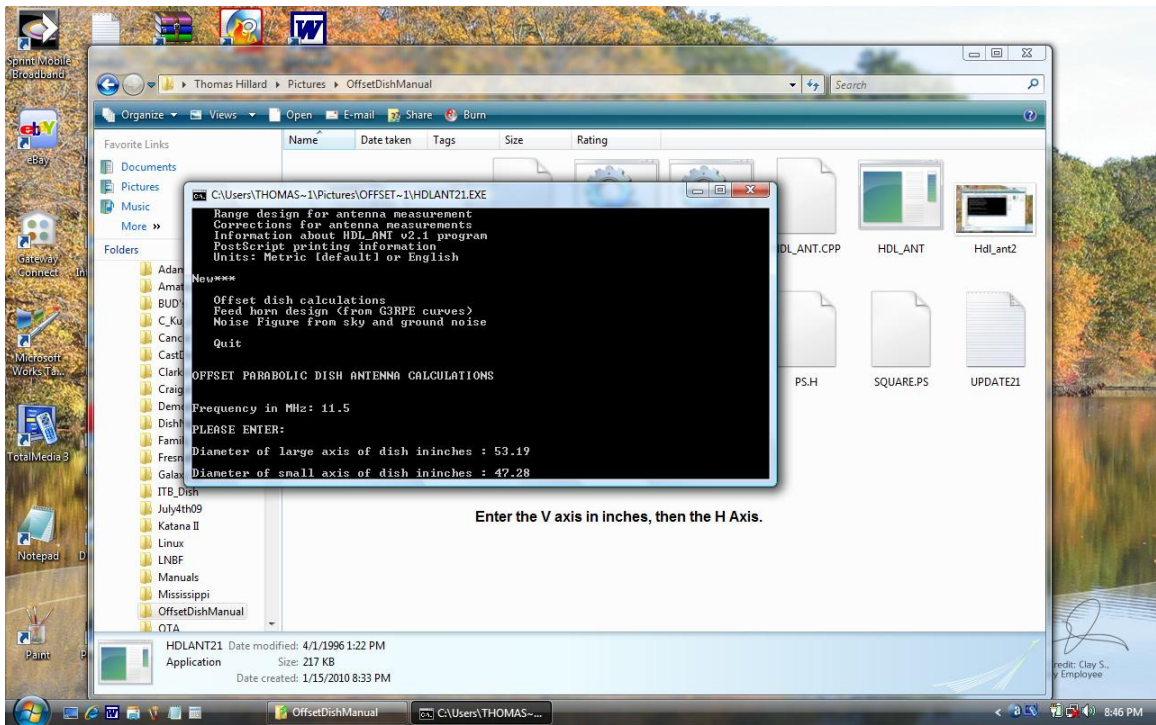


This is where you enter the V and H axis measurements.

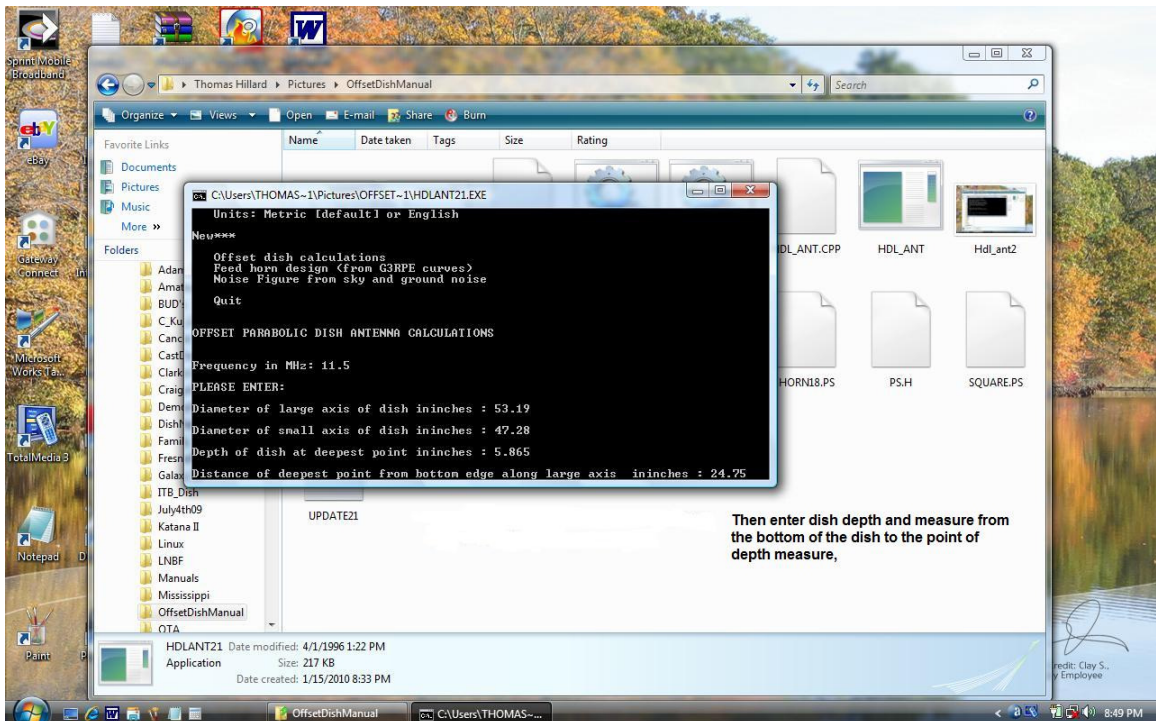

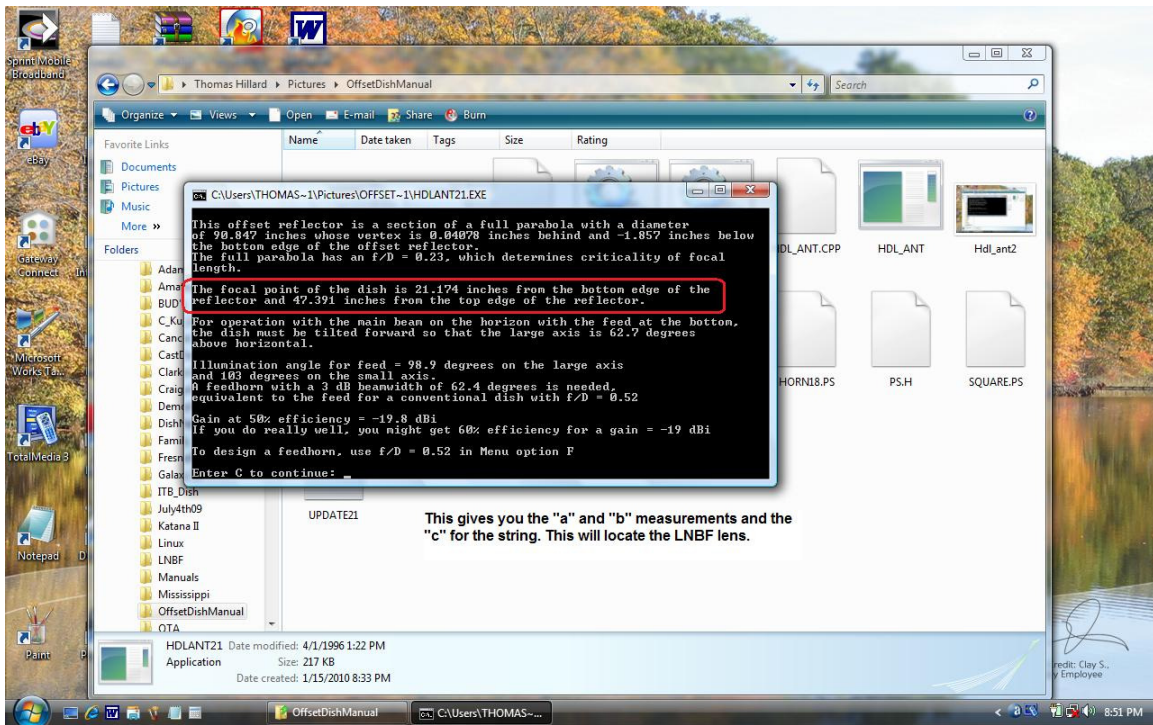

This is what you need to mark the string and find the focal point.

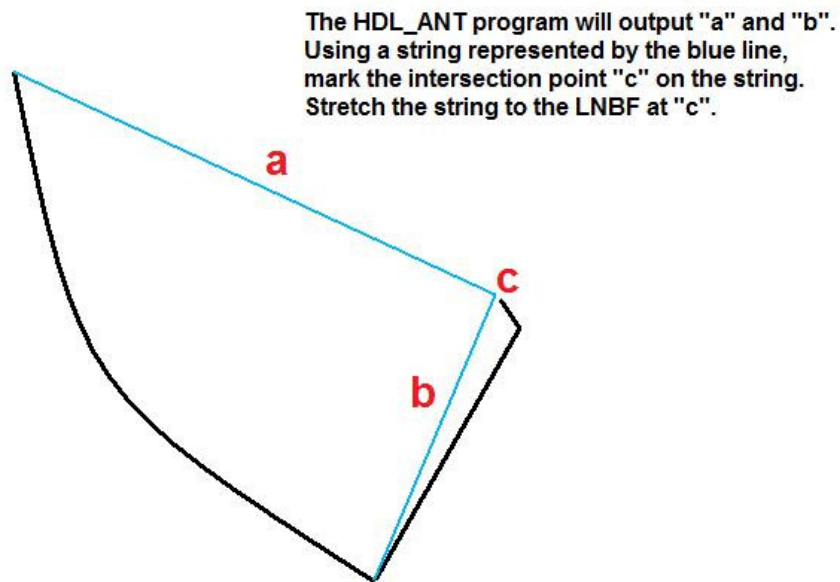

With the dish mounted and plumb, set the elevation.
Use this site to get your data. All you need is your Zip Code.
<http://www.satsig.net/>




Use the string and adjust the LNB so that the lens face just touches the string at “c”. Note the blue tape on the dish, this was determined to be the focal center of the dish. The focal length of 35” for this dish made it necessary to aim the LNB upward and not at the apparent center of the dish.

Now use Solar Noon Calculator from NOAA to locate your true south satellite.


<http://www.esrl.noaa.gov/gmd/grad/solcalc/>



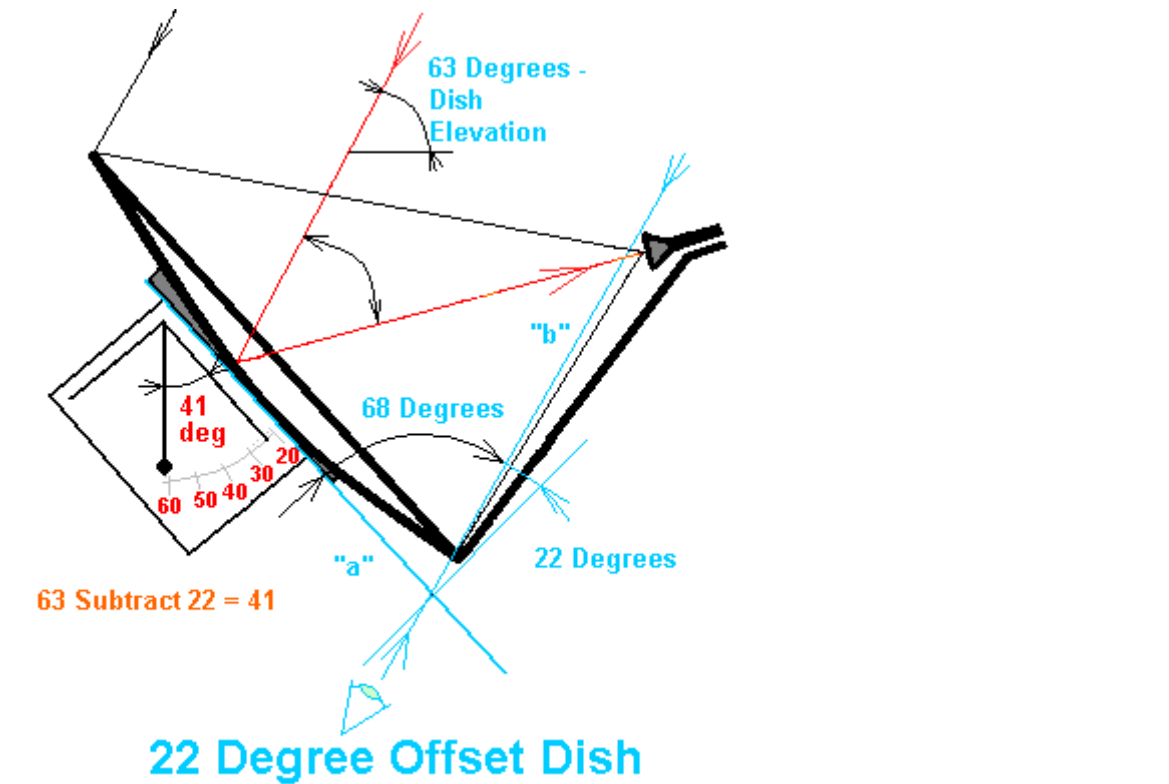





The dish elevation is set to 61 degrees and subtracting the 33.7 degrees read on the dish bracket results in the offset of 27.3. That meets the published specification for the dish.

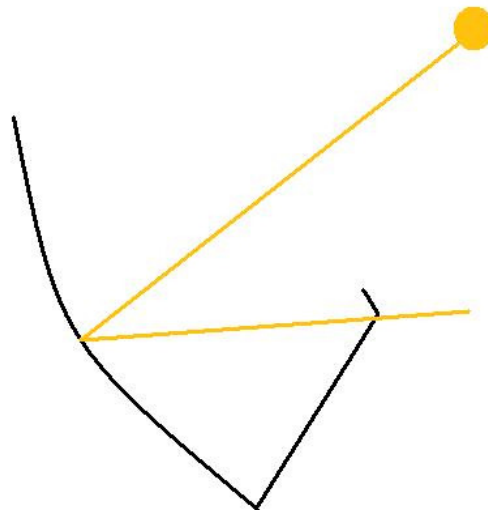

If the dish is aimed below the correct elevation the focal point will fall below the LNB.

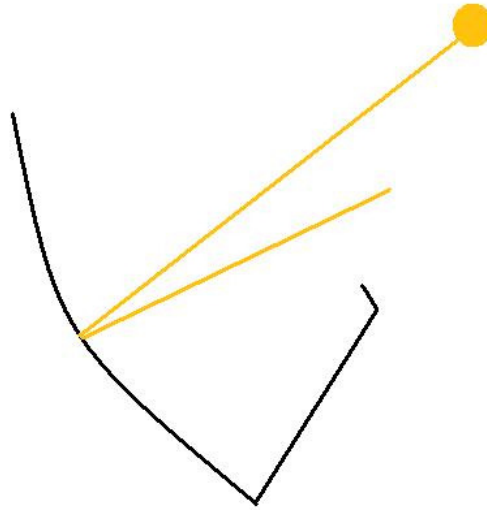

Aiming the dish above the correct elevation will move the focal point above the LNB.

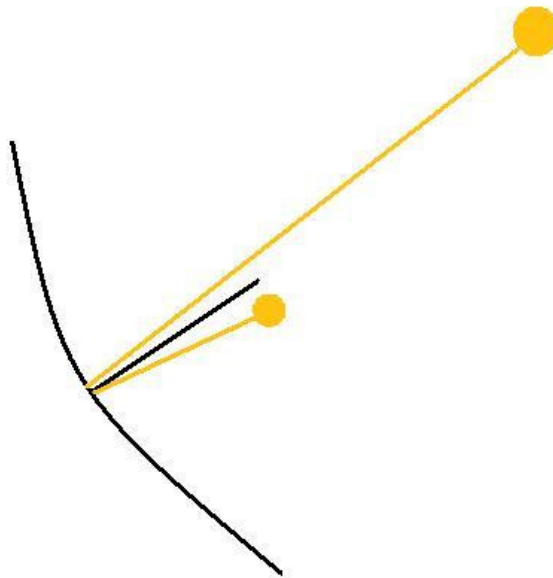

Azimuth adjusted too far West will move the focal point too far West. This is how to set up an Offset LNB.