

## TECHNICAL SPECIFICATIONS

- Frequency range :	950 - 2150 MHz
- Power :	13 / 18 V, 22 kHz pass
- Power consumption :	max. 45 mA at 18 V
- In- and output reflection :	> 10 dB
- Filter VHF - UHF :	min. 30 dB

See other side of this folder for graphical specifications

04/98



**johansson**<sup>®</sup>

Accessoires terrestres et satellites  
Terrestrial and satellite accessories

**UNITRON n.v.**

Frankrijklaan 27  
B-8970 Poperinge  
Belgium

TEL +32 57 33 33 63 (commercial support)

TEL +32 57 33 75 20 (technical support)

FAX +32 57 33 45 24

E-mail : Unitron@Johansson.be



**johansson**<sup>®</sup>

Order number :


**9626**

Type :  
PROLINER


Adjustable active line equalizer

## GRAPHICAL SPECIFICATIONS

- Gain / loss range :  
-18 dB to +11 dB  
± 1 dB

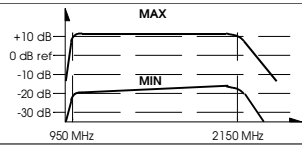


- Slope range :  
0 dB to -15 dB  
± 1 dB

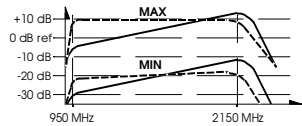

**APPLICATIONS** Equalizing, leveling and compensating the frequency spectrum to optimal adaptation especially for digital receivers in individual and multi satellite systems.

### For individual reception

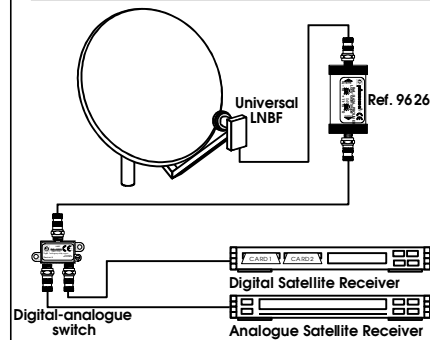

### For multi reception

