



MOTORIZE YOUR ANTENNA ACTUATOR

Polar Mount, Remote Control, RG6 Cable



MINI
(MN)



REGULAR
(TD)



HEAVY DUTY
(HV)



REMOTE 3 IN 1 PACKAGE WITH 24 MEMORIES



PM 12 powder coated polar mount
TD powder coated regular actuator
MP-520 Remote Positioner with 24 Memories

Features:

- > Compatible with most of the offset dishes (Recommended dish size: 100cm MAX)
- > 110° azimuth angle (70° R+40° L or 40° R+70° L)
- > 20° ~ 80° Elevation angle (corrosion resistant)

MANUAL 3 IN 1 PACKAGE:



- > PM 12 powder coated polar mount
- > TD powder coated regular actuator
- > EW-101 high power East / West manual positioner

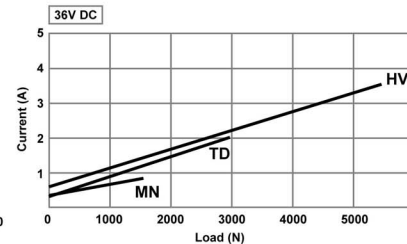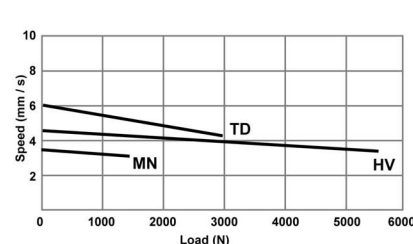


Model	MN(mini)	TD(regular)	HV(heavy-duty)
Input	36 V DC (24 V DC available)		
Load Capacity	1500N	3000N	5500N
Stroke Length	200,250,300 mm	300,450,600 mm	450,600,900 mm
Drive	ACME		
Full Load Speed	2.6mm/sec	4.2 mm/sec	3.8 mm/sec
Duty Cycle	20 %		
Operation Temperature	-26° ~ 65° C (-15° ~ 150° F)		
Limit Switch	Adjustable		
Sensor	Reed Switch Sensor		
Static Load	2800N	4500N	9000N

MN	Stroke	6"	8"	10"	12"
	Length L(mm)	210	260	310	360

TD	Stroke	6"	8"	10"	12"	18"	24"
	Length L(mm)	240	290	340	390	540	690



HV	Stroke	18"	24"	36"
	Length L(mm)	550	700	1000



Actuator Packing Information

Model	PCS/CTN	G.W./CTN	MEAS./CTN	PCS/20FT		PCS/40FT
MN 8	10	18.5KGS	1.22'	8200	-	12500
MN10	10	19.5KGS	1.36'	7300	-	11800
MN12	10	20.5KGS	1.49'	6700	-	11200
TD12	4	15.9KGS	1.16'	3400	4200	6200
TD18	4	19.5KGS	1.46'	3000	4000	5000
TD24	4	23.0KGS	1.82'	2200	3000	4300
HV18	3	25.8KGS	1.75'	1700	-	2676
HV24	3	28.5KGS	2.07'	1400	-	2421
HV36	1	10.5KGS	1.49'	650	-	1200
HSE-EW101	1	8.6KGS	0.45'	2200	-	-



MOTORIZE YOUR ANTENNA
actuator, control, polar mount, cable

1F-1, No. 79, SEC 1, SHIN-TAI 5 ROAD, SHUIR CITY, TAIPEI HSIEN, TAIWAN
Fax: +886-2-2698-1324 E-mail: motteck@seed.net.tw

TEL: +886-2-2698-1220
http://www.motteck.com
MO-SAT-2-D-001-02