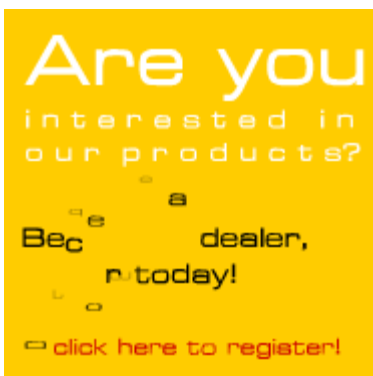


[Home](#)[Over Ons](#)[Kanaallijst](#)[Technische Support](#)[Links](#)[Gebruikers](#)[Paswoord](#)[Paswoord vergeten?](#)
[Registreeer](#)[Receivers](#)

Producten

[TV](#)[Receivers](#)[Schotels](#)[Lnb](#)[Camping](#)[Motor - Mount](#)[Diversen](#)[Bevestiging](#)[Complete set](#)[Cam - Kaart - Cas](#)[Kabels](#)[Multiswitches](#)

Product Specificatie

SAB SAFIR FTASC (S600)



KEY FEATURES

- 200MHZ ST-5119 RISC PROCESSOR
- PROFESSIONAL PICTURE IN PICTURE FUNCTION
- MULTI-PICTURE UP TO 16 CHANNELS
- BLIND SCAN
- PC EDITOR PROGRAM FOR EDITING & UPGRADING CHANNELS
- SCREEN SAVER FUNCTION IN RADIO MODE
- MULTI-EVENT TIMER FUNCTION (DAILY / WEEKLY, UPTC)
- FAST CHANNEL SCAN
- Bitmap

GENERAL FEATURES

- MPEG-1&2 / DVB COMPLIANT VIDEO AND CD QUALITY SOUND
- USER FRIENDLY MULTI-LANGUAGE OSD WITH 256 COLORS
- POSITIONING BY DiSEqC 1.2 AND USALS
- POWERFUL EPG WITH MULTIPLE-DAY INFORMATION
- AUTO RESOLUTION CONVERSION FOR NTSC/PAL
- VARIABLE TV-SCREEN FORMAT RATIO CONVERSION (16:9)
- TELETEXT (OSD/VBI INSERTION) AND SUBTITLE SUPPORT
- LOCK
- SOFTWARE UPGRADE FROM PC (PC TO STB) OR STB (STB TO PC)
- S/PDIF FOR DOLBY DIGITAL BITSTREAM OUT WITH COAXIAL
- 0/12V POWER OUTPUT FOR EXTERNAL DEVICE (OPTION)
- 16 FAVORITE GROUPS
- PARENTAL LOCK (MENU, INSTALLATION, FRONT PANEL LOCK)
- SVHS OUTPUT (OPTION)
- OPTICAL DIGITAL AUDIO OUTPUT (OPTION)

TECHNICAL SPECIFICATIONS

Bitmap

Tuner & Channel

Antenna I/O connector: F-Type Connector / Female

Frequency Range: 950 MHz ~ 2,150 MHz

Symbol Rate: $2 \leq RS \leq 45$ Msps (SCPC & MCPC)

Vertical : 13.5V Horizontal: 18V

LNB Power & Polarization Current: Max. 500mA with Overload P

22KHZ: Frequency: 22KHZ $\pm$ 2KHZ

Amplitude: 0.6V $\pm$ 0.2V

DiSEqC control: Version: 1.0, 1.2 and USALS Compatible

Demodulation: QPSK

FEC Mode Rate: 1/2, 2/3, 3/4, 5/6, 7/8

1 Input with Loophthrough

MPEG Transport Stream & A/V Decoding

Transport stream: ISO/IEC 13818 MPEG-2

Profile level: MPEG-2 MP@Main Level

Aspect ratio: 4:3, 16:9, Letter Box

Audio decoding: MPEG / MusiCam Layer I & II

Audio Sampling Rate: 32, 44.1, 48 KHZ

Video resolution: 720 x 576 (PAL), 720 x 480 (NTSC)

Bitmap

SYSTEM RESOURCES

CPU: STi 5119

Flash Memory: 2 Mbytes

SDRAM: 128 Mbits

Front Panel:

Buttons: 7 Buttons (Power, CH, VOL Up/Down)

Front Display: 7-Segments, VFD(Optional)

A/V Data In/Out:

TV SCART: Video (CVBS, RGB) / Audio (L/R)

VCR SCART: Video(CVBS) / Audio (L/R)

RCA/Cinch: Video / Audio (L/R), S/PDIF (Coaxial)

Serial Port: RS-232, 9-Pin D-sub Female

RF Modulator

RF I/O Connector: IEC 169-2, Female/Male

Frequency Rate: 47 MHz ~ 862 MHz

TV standard: PAL B/G/I/D/K

Output channel: 21 - 69

Power supply

Type: SMPS

Input voltage: 90 - 250 V AC , 50 Hz / 60 Hz

Power consumption: Max. 25 W

Standby power: Max. 9 W

Operating temperature: 0° C ~ 45° C

Storage temperature: -10° C ~ 70° C

Physical specification: Size (WxDxH): 300 x 230 x 70 mm
Weight (net): 2.4 Kg

© 2005 Sab Trading B.V, Inc. All Rights Reserved.

[Home](#) | [Over Ons](#) | [Kanaallijst](#) | [Technische Support](#) | [Links](#) | [Kontakt](#) || [Klik hier voor Engels](#)
Zend e-mail naar: info@sabsatellite.nl.
Het beste resultaat met internet Explorer 5 of hoger.