

How do I install it?

- 1 - Insert the PowerCam module in your demodulator.
- 2 - Access your demodulator menu and select "Common Interface", then click OK. Select "PowerCam", and then click OK. Finally, select the language in which you wish your information to be displayed and click OK.
- 3 - In the next menu, "SmartCard" and "Case" are displayed.



Smartcard :


- If you inserted a card in the **PowerCam module**, the "Smartcard" menu will grant access to all of its information:
 - Activation of channels integrated in the **PowerCam**, this feature is explained on the "Activating integrated channels" page,
 - Subscription rights,
 - Channels,
 - Level of morality, etc..

Case

- When "Case" is selected, you may select either YES (to access the next menu) or NO (to return to the previous menu). You must select YES and then click OK.

For optimal performance, it is advisable to deactivate the unused "Cases". For example: if your card is encrypted with the Mediaguard system, you should set all systems to OFF except for "Mosaic S", which should be ON. To do this, simply click the line that you wish to deactivate and click OK.

The menu as shown on the right is displayed :

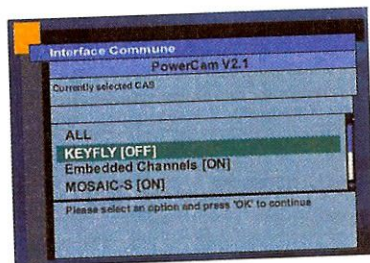

Menu	Description
All	To select all
Key Fly	Internal encryption (not used)
On-board channels	Channels integrated within the PowerCam
Mosaic S	Mediaguard encryption system
Mosaic V	Viaccess encryption system
Mosaic I	Irdeto encryption system
Mosaic C	Cryptoworks encryption system
Mosaic X	Conax encryption system
Mosaic B	Betacrypt encryption system