


M3U List Edit:

1. Open list by a text editor , like PSPad

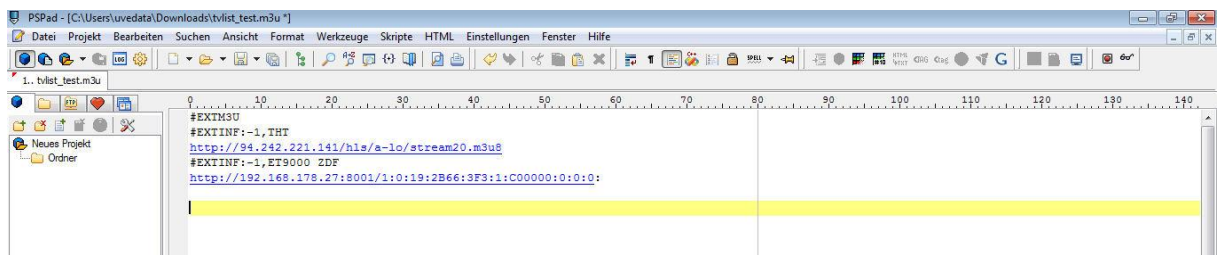

File structure example:

#EXTM3U

#EXTINF:-1,THT

<http://94.242.221.141/hls/a-lo/stream20.m3u8>


#EXTINF:-1,ET9000 ZDF

<http://192.168.178.27:8001/1:0:19:2B66:3F3:1:C00000:0:0:0:>

Channel name

Address

CONCERNING CHANNEL **ET9000 ZDF** , that is a live stream from Clarke-tech ET9000 in a LAN Home Network to the HD4100. The address is same Open Webif

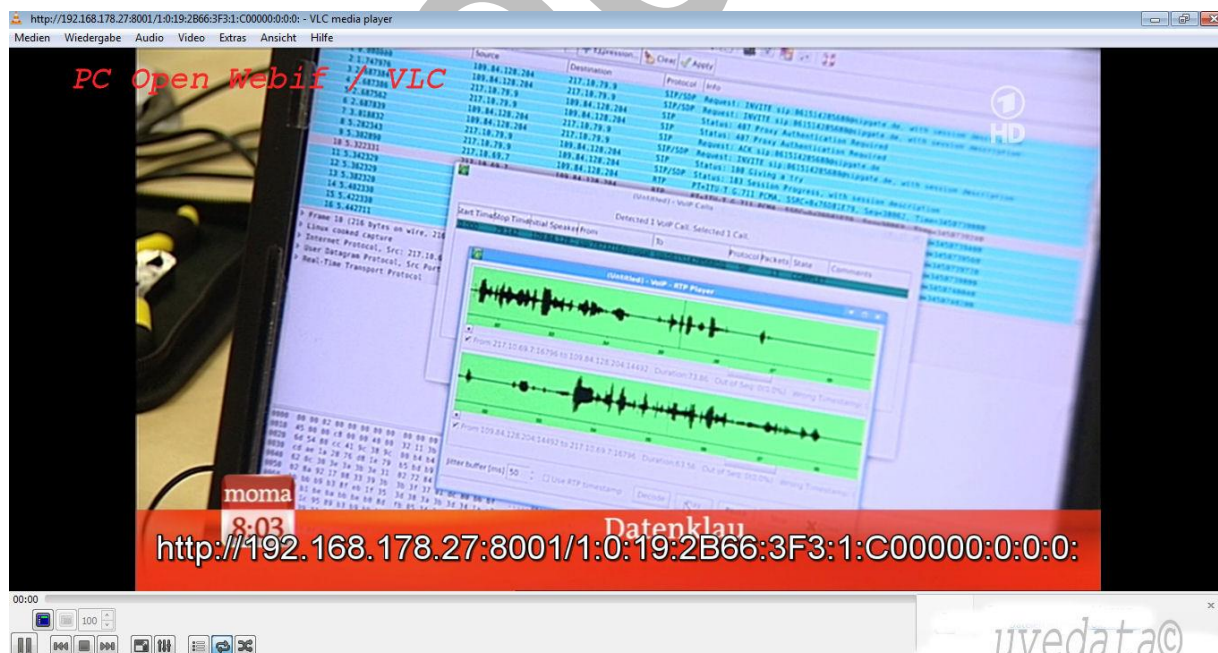

2. Save and Copy to an USB Memory Device
3. Connect USB Memory Device to HD4100
4. Goto File Manager menu

5. Choose the M3U file



6. Receiver load data to the list. The data will to default list added ! For a fresh new list , please first old channels (default list) deleted !!
7. Note: special text characters are not supported !

Switch between Satellite LIST ~ IPTV LIST by F4 button. Channel list must open !



If open menu functions, the receiver switch to satellite receiver function !

To change size: Info button > Zoom In and Out



Note: limit > 200 channels !!