

How To Upgrade Al7bar CI+ Ultra (FSCI_5100 Plus+ Ultra) Software



This is step-by-step guide for “How to Upgrade Al7bar CI+ Ultra Software”. Please follow the steps and your receiver will be upgraded to newer software.

Things to Prepare

You must have the following things before you upgrade your receiver.

- 1- RS-232 Cable (Parallel Connections i.e. : **2-2, 3-3, 5-5**)
- 2- Software setup program for Al7bar CI Ultra **AL7BAR Downloading Tool .zip**
- 3- Update for the Boot file “**boot_Al7bar CI+ Ultra_ver61_040708.bin**”
- 4- Software file to be loaded “**Al7bar CI+ Ultra_050121_254_api.bin**”
- 5- Installed WinZip in your system to unzip the software files.
- 6- And, of course, the receiver.

Installing Al7bar CI+ Ultra Software

Follow the steps below:

- ✍ create a folder named Al7bar on your C drive
- ✍ Unzip the software to the C:\Al7bar



Select an item to view its description.

See also:

[My Documents](#)

[My Network Places](#)

[My Computer](#)


Updating the Software for the First Time

If you are upgrading first time, its Boot must be updated first. Name of Boot file is:

boot_AI7bar CI+ Ultra_ver61_040708.bin

Follow the steps below to update its Boot:

- ✍ Make sure that receiver and the system is connected properly and the receiver is ON.
- ✍ Run the installed loader from the folder where you unzipped the up-loader software. The screen below will appear.

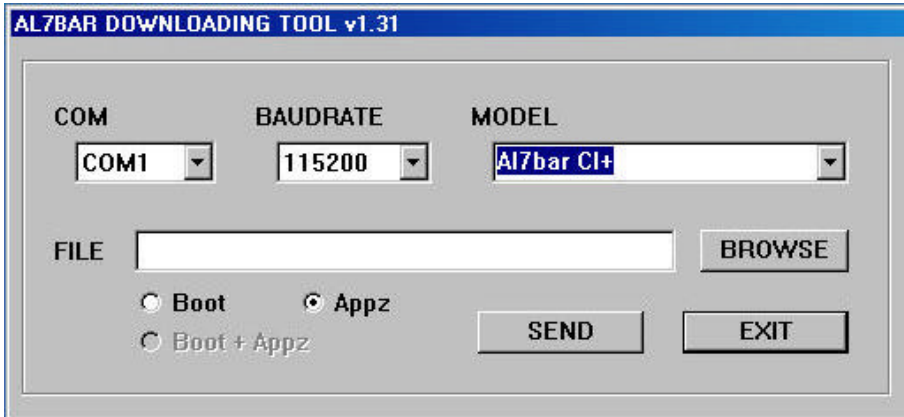

AL7BAR DOWNLOADING TOOL v1.31


COM: COM1 | BAUDRATE: 115200 | MODEL: AI7bar CI+

FILE: [] | BROWSE

Boot | Appz
 Boot + Appz

SEND | EXIT

- ✍ Make sure Boot option is selected.

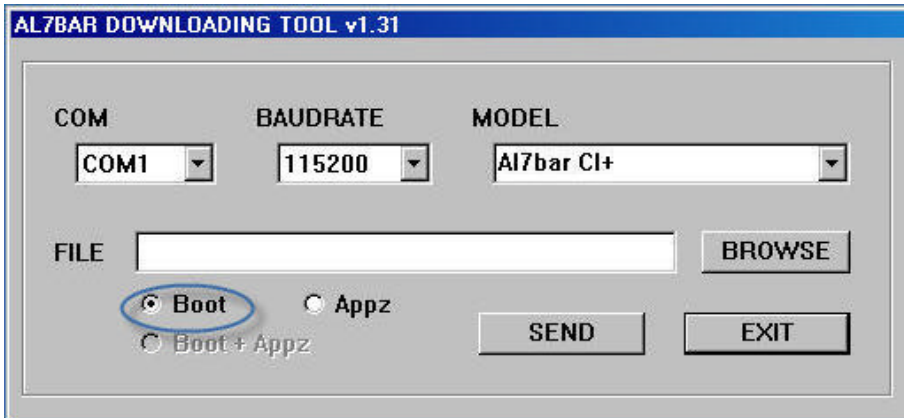

AL7BAR DOWNLOADING TOOL v1.31

COM: COM1 | BAUDRATE: 115200 | MODEL: AI7bar CI+

FILE: [] | BROWSE

Boot | Appz
 Boot + Appz

SEND | EXIT

- ✍ Make sure **LCI** is written in model box



AL7BAR DOWNLOADING TOOL v1.31


COM: COM1 | BAUDRATE: 115200 | MODEL: LCI

FILE: [] | BROWSE


Boot | Appz
 Boot + Appz

SEND | EXIT


✍ Now click “Open File” and select the Boot update file as shown in figure below:

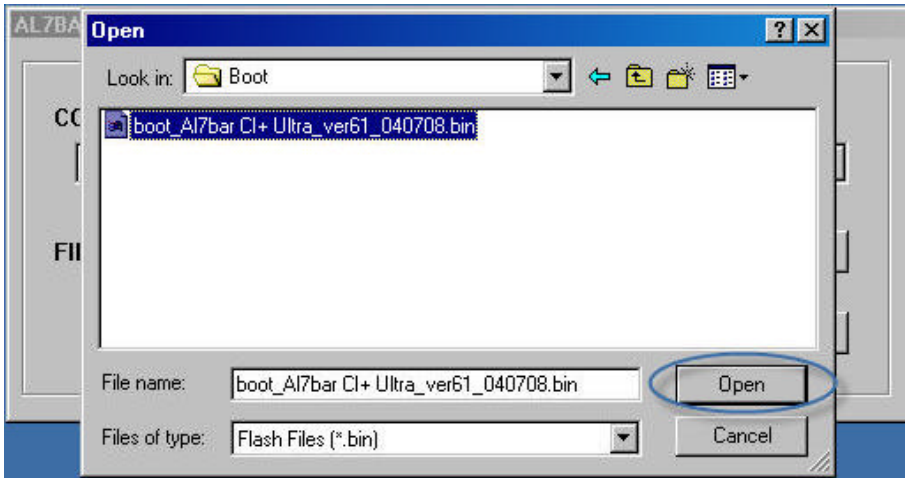


✍ Once selected the file as shown above, click open and click “Send” to upload it. As connecting window is showing below:

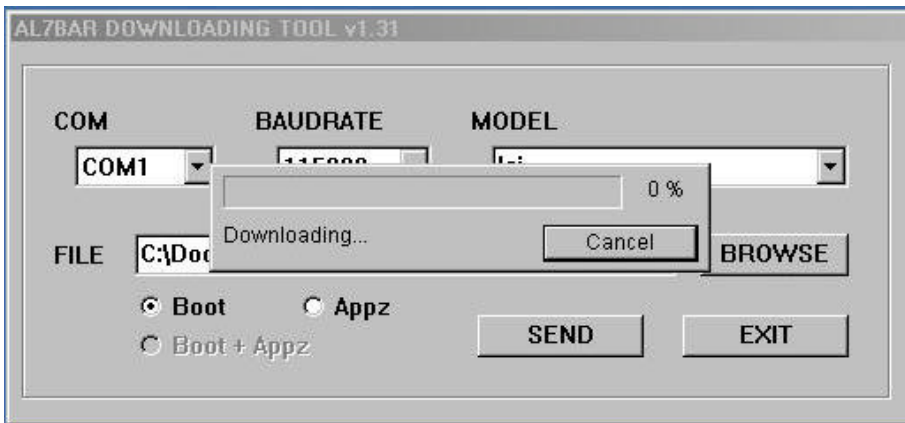

✍ After connecting window appeared, it will start uploading the selected program.

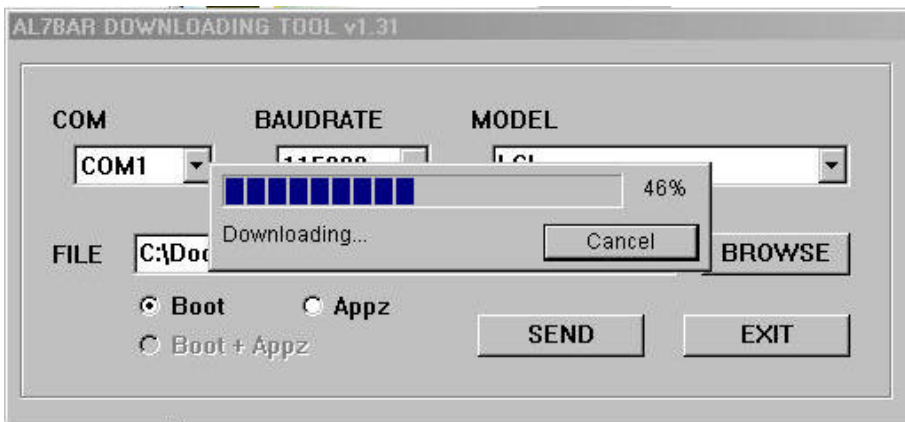


✍ Once it is finished, it will inform you that **“Download is complete”**.

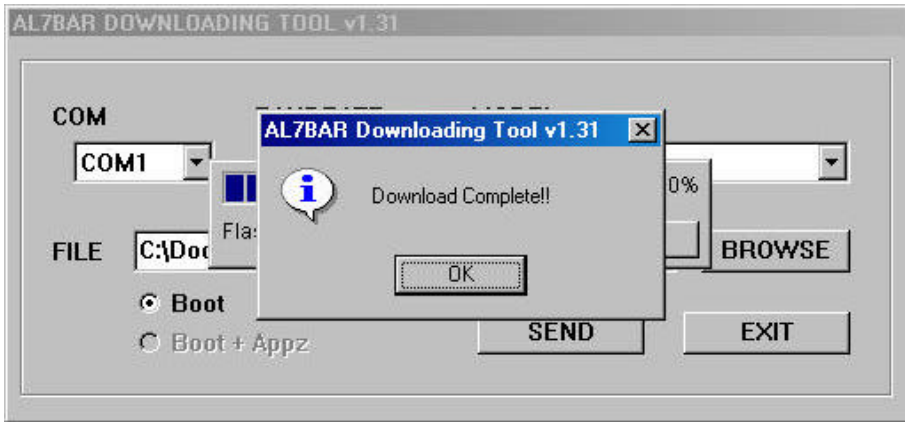


Congratulations! You have downloaded boot in the receiver successfully.

Updating Al7bar CI+ Ultra Software

✍ Select **“Application”** in Upgrade menu and **“Al7bar CI+ Ultra”** in model.

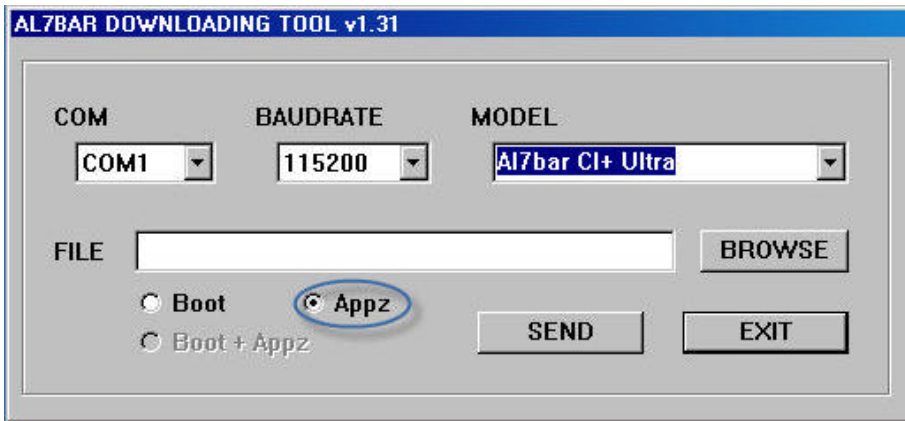


✍ Click **“Browse”** file button and locate the software file (BIN file) to be downloaded in the receiver and click **“Open”** as:

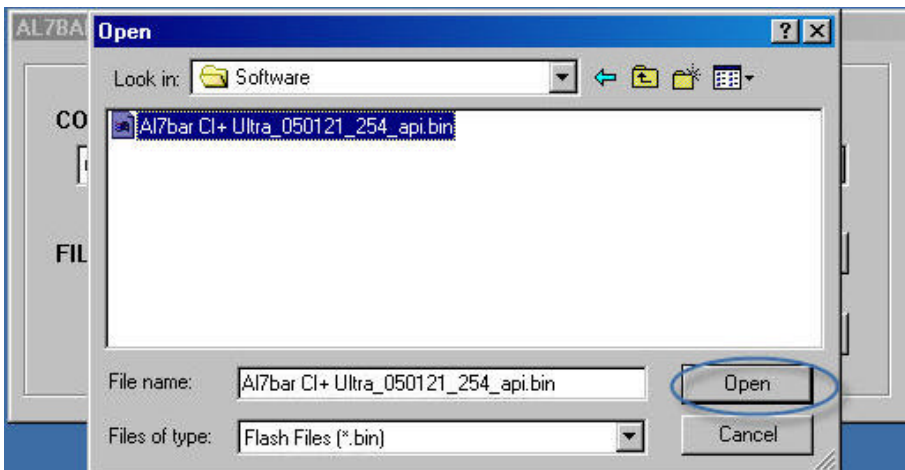


- ✍ Once file is selected, click “**Send**” to upgrade the software. Status will be connecting as:



- ✍ Once uploading is shown, after connecting to the receiver, it will show the uploading progress as:

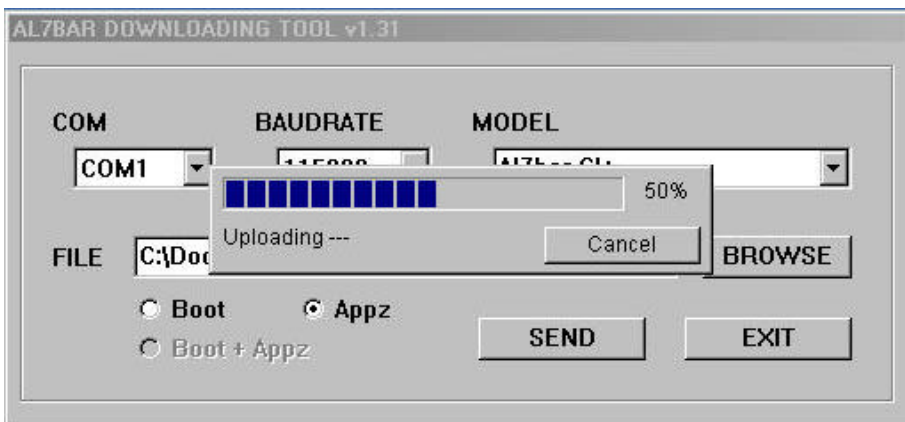

- ✍ After completing the process, loader will confirm you that software has been downloaded successfully as shown in the figure.

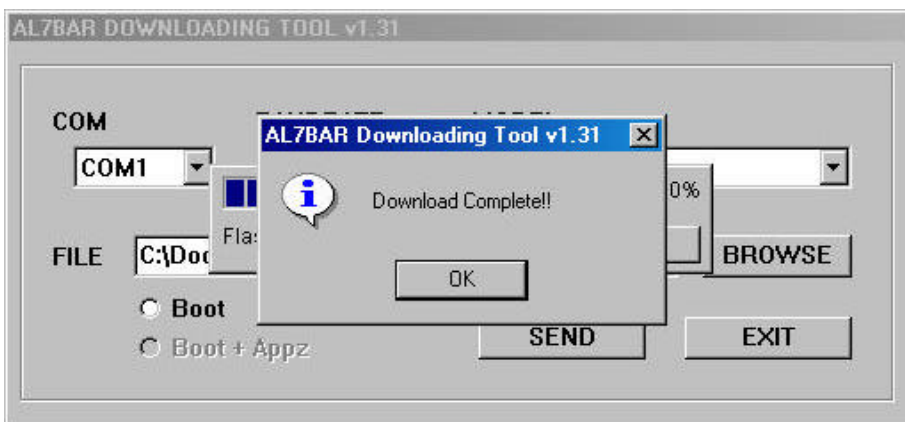

- ✍ Plug-in the receiver and Tune the Satellite.
Watch and Enjoy!

Note:-

1- *File names and locations used may be changed accordingly.*